



## Solution 1: Wirelessly connect a complex array of safety and activation devices using a BTR Door Controller.

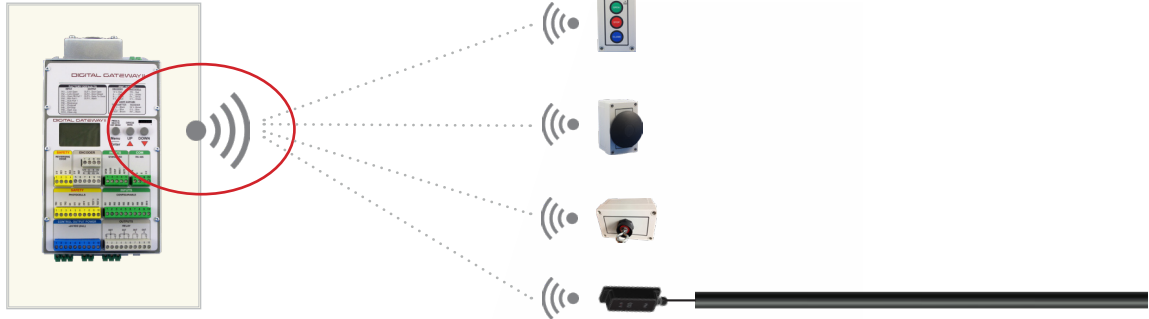

**SeyWave® Internal Host** (built into BTRs DGII® & DG-Mini®)

## Solution 2: Wirelessly connect multiple safety and activation devices to any existing controller by adding a SeyWave® External Host.

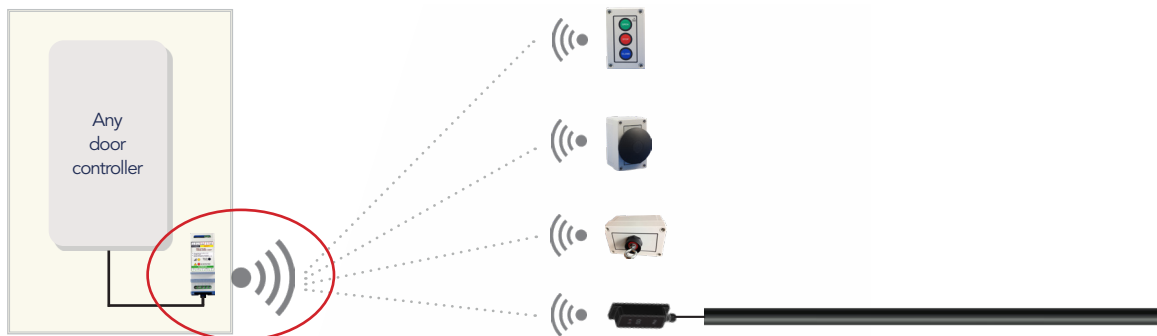

**SeyWave® External Host** (6 outputs)

## Solution 3: Wirelessly connect your safety device to any existing controller by adding a Seywave® Remote Host.



**SeyWave® Remote Host**  
(reliable 2-way communication)

### Discover the BTR Advantage

- › Custom engineered solutions
- › Specialized manufacturing services
- › Universally compatible